



# Data Management Software for Environmental Measurement AS-60



**Free trial version  
now available on  
our website.**



# Comprehensive Software for Environmental Noise Measurement

The AS-60 software allows you to graphically display measurement data, perform calculation processing and excluded sounds processing, create reports, output files, and play real sounds.

**Easy to use**

**Simultaneously display multiple data items**  
(up to eight data items)

**Data combination**

**Quick and easy report creation**

**Data stored in a data recorder can also be loaded**  
(CSV files saved by the DA-40 Viewer)

## Easy to use

**Drag-and-drop**

**Simply drag-and-drop to read and display data**

**Displays a list of options for the next operation**


**Single click to play wave files**

**Copies the calculations results to the clipboard**

## Simultaneously display and edit multiple data items


- Simultaneously display and edit data measured at multiple sites\*
- Data measured by each sound level meter in  $L_p$  mode (Auto1) and  $L_{eq}$  mode (Auto2) is displayed simultaneously.

\* Up to eight data items can be loaded simultaneously, and the graphs for up to four data items can be displayed simultaneously.

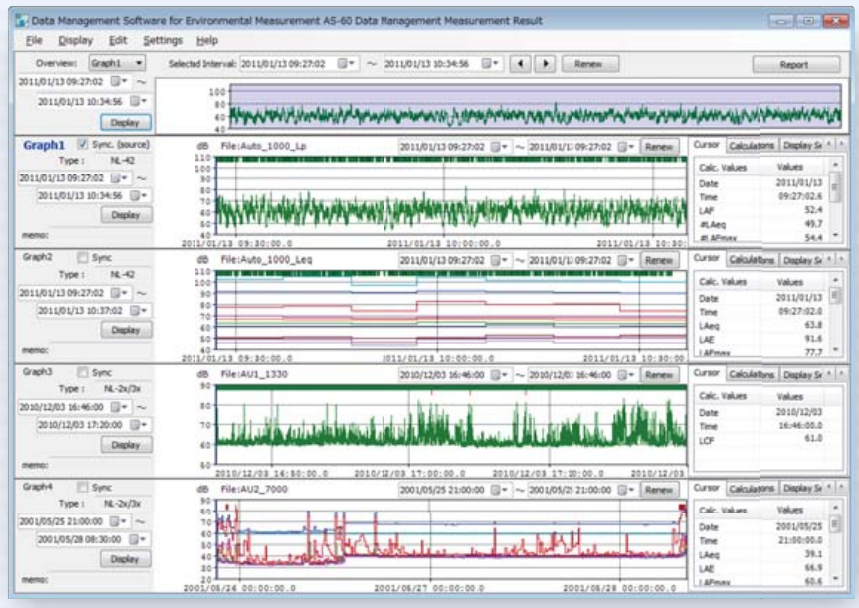

## Data combination

- This function allows you to combine multiple items of measurement data that were divided during a battery change, or some other reason. The combined data can be displayed and edited as a single file (only data saved by NL-42/52).

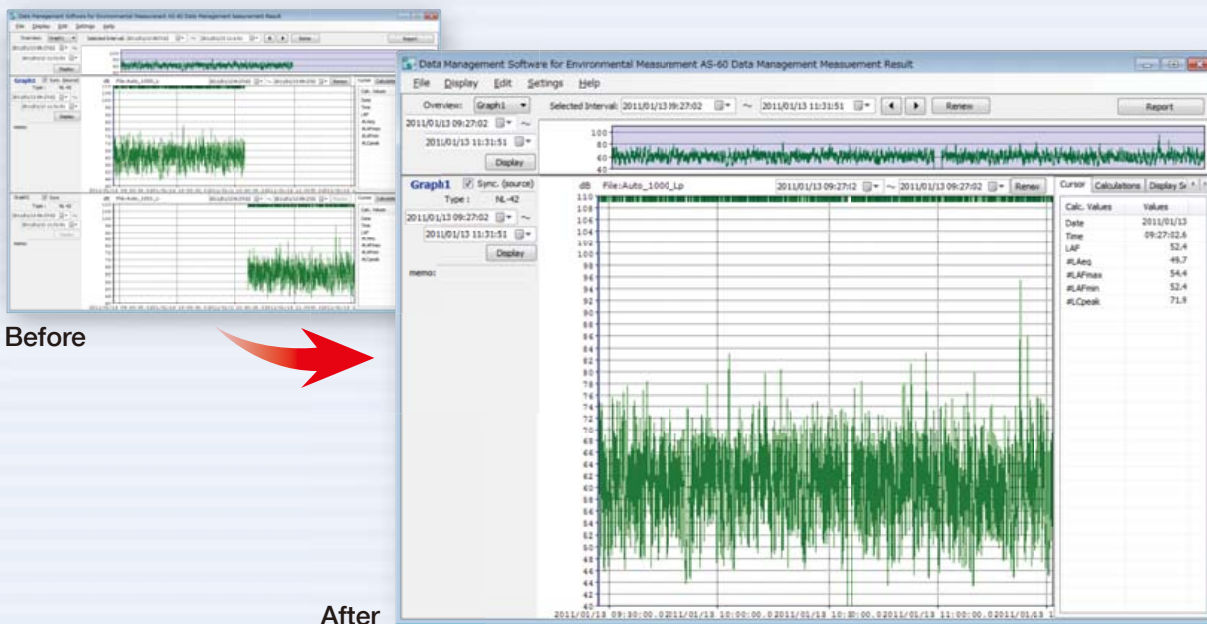

## Report Creation

- Easy creation of reports such as daily logs
- Allows you to print collected data and output to an Excel file or text file.

Data output as an Excel file

Printing a report


Start	LAnq	LAE	LAFmax	LAFmin	LS	LSD	LSP	LSS	Over	Under	Excluded personal
2011/01/13 07:00:00	38.6	75.1	65.7	33.1	41.1	39.7	33.9	34.6	-	-	-
2011/01/13 08:00:00	36.2	85.6	72.6	37.4	54.3	51.8	46.3	38.9	38.4	-	-
2011/01/13 09:00:00	34.4	89.9	82.7	44.1	55.8	53.7	48.4	46.3	45.9	-	-
2011/01/13 10:00:00	31.9	87.5	79.5	45.1	54	53.8	48.5	46.8	46.5	-	-
2011/01/13 11:00:00	53.4	88.9	78.9	45.1	57.4	55.5	49.7	47	46.6	-	-
2011/01/13 12:00:00	31.8	87.3	89.7	43.4	56.1	54.4	49.3	46.9	46.6	-	-
2011/01/13 13:00:00	31.4	87.1	86.2	45.1	55.8	54	49.3	47.1	46.8	-	-
2011/01/13 14:00:00	31.8	87.3	78.7	45.1	55.1	52.7	48.6	46.8	46.5	-	-
2011/01/13 15:00:00	61	96.6	86.7	45.1	59.1	56.5	49.9	47.4	47	-	-
2011/01/13 16:00:00	53.5	89	76	44	58	55.4	48.7	46.1	45.7	-	-
2011/01/13 17:00:00	49.6	85.2	79.5	43.1	53.6	51.1	44.3	40.7	44.5	-	-
2011/01/13 18:00:00	49.9	85.4	78.6	43.1	53.2	51.4	44.4	44.8	44.5	-	-
2011/01/13 19:00:00	48.4	84	65.7	39.1	52.6	50.8	46.3	43.3	40.4	-	-
2011/01/13 20:00:00	47.6	83.2	71.5	34.6	52.6	49.5	43.4	38.9	38.6	-	-
2011/01/13 21:00:00	36	71.5	46.9	34	36.7	36.4	35.9	35.1	35.1	-	-
2011/01/14 00:00:00	36.1	71.7	45.9	34.3	36.8	36.7	36.1	35.4	35.2	-	-
2011/01/14 01:00:00	34.9	70.4	43.1	33.2	36.1	35.8	34.7	34	33.8	-	-

# Data Management Software for Environmental Measurement (Includes the octave and 1/3 octave data management software) AS-60RT

Adds support for handling octave band analysis data to AS-60



- Allows using a computer to manage data measured with octave band and 1/3 octave band real-time analysis program NX-42RT (NL-42/52 option) or High-Precision Sound Level Meter NA-28 (with 1/3 octave band analysis function)
- Stored data and real sound files can be loaded, allowing graph display and various processing operations of octave band analysis results
- Stored data all-pass values can also be used for creating reports

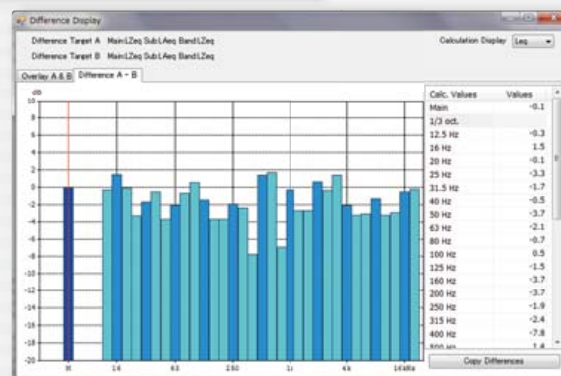

Data comparison display screen

Supported models (Only auto store data are supported, excl. DA-40 Viewer)

AS-60

NL-52/42

NL-32/31/22/21

DA-40 Viewer

VM-53A

AS-60RT

NX-42RT

NA-28

Recommended computer specifications (Common for AS-60/AS-60RT)

CPU	Intel Core™2 Duo 2.0 GHz or higher
RAM	2 GB or more
DISPLAY	XGA (1024 x 768) or more, at least 65 536 colors
OS	Microsoft Windows XP Professional 32 bit, Microsoft Windows 7 Professional 32 bit and 64 bit

\*If AS-60/60RT is used for the NL-52/42, the NX-42EX is also needed.

\* Specifications subject to change without notice.

Distributed by:

 **RION CO., LTD.**  
http://www.rion.co.jp/english/

3-20-41, Higashimotomachi, Kokubunji, Tokyo 185-8533, Japan  
Tel: +81-42-359-7888 Fax: +81-42-359-7442